





bizhub 360i

Black & White A3 multifunctional





CUSTOMER BENEFITS



Secure network integration, data encryption, hard drive overwrite, and advanced user authentication



Productivity

Reliability, high-speed scanning and printing, combined with powerful finishing functions



Sustainability

Numerous eco features reduce energy consumption and costs



Intuitive operability

Operate the bizhub like a smartphone or tablet with fully customised user interface




Application ecosystem

Enhanced efficiency thanks to Konica Minolta's extensive applications portfolio



ServicesEfficient printer fleet management, including automatic con-sumables delivery, pro-active maintenance and remote setup


OPTIONS





Trusted Platform Module LK-115v2

Antivirus LK-116 FOIP activation LK-117







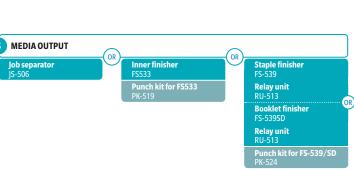



FINISHING FUNCTIONALITIES













mixplex/















stapling stapling punching

punching

Duplex

Half-fold

insertion. report

Letter-fold

Booklet

Offset sorting

printing

Stapling (offline)

DESCRIPTION

ENHANCED FEATURES	
LK-105v4 OCR text recognition	Searchable PDF and PPTX
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Generates various file formats incl. DOCX, XLSX and PDF/A
LK-111 ThinPrint® client	Print data compression for reduced network impact
LK-114 Serverless pull printing	Secure and Follow Me printing solution requiring no server
	application
LK-115v2 Trusted Platform Module	Trusted Platform Module for protection of data encryption and
	decryption
LK-116 Antivirus	Bitdefender® antivirus provides real time scanning of all
	incoming and outgoing data
LK-117 FOIP activation	incoming and outgoing data Fax over IP networks (T.38), requires fax kit
LK-117 FOIP activation	
LK-117 FOIP activation	
CONNECTIVITY	Fax over IP networks (T.38), requires fax kit
CONNECTIVITY FK-514 Fax board	Fax over IP networks (T.38), requires fax kit Super G3 fax, digital fax functioality
CONNECTIVITY FK-514 Fax board UK-221 Wireless LAN	Fax over IP networks (T.38), requires fax kit Super G3 fax, digital fax functioality Wireless LAN and wireless LAN Access Point Mode

Finger vein scanner

Various ID card technologies

Installation kit for ID card reader

OTHERS	
OC-511 Original Cover	Cover instead of ADF
DF-632 Document feeder	Reversing automatic document feeder, capacity 100 originals
DF-714 Document feeder	Dualscan automatic document feeder, capacity 100 originals
WT-506 Working table	Authentication device placement
KP-102 10-Key pad	For use instead of touchscreen
SC-509 Security kit	Copy guard function
EM-908 Replacement SSD	1 TB SSD to increase storage space
KH-102 Keyboard holder	To place USB keyboard
CU-102 Air cleaning unit	Improving indoor air quality by reduced emission
MEDIA INPUT	
IM-102 Intelligent media sensor	Autodetects paper weight and type
PC-116 1x Universal tray	500 sheets, A5-A3, 52-256 q/m ²
PC-216 2x Universal tray	2x 500 sheets, A5-A3, 52-256 g/m ²
PC-416 Large capacity tray	2,500 sheets, A4, 52-256 g/m ²
PC417 Large capacity tray	1,500 + 1,000 sheets, A5-A4, 52-256 g/m ²
ND250l Copier desk	Provides storage space for print media and other materials
LC-302 Large capacity tray	3,000 sheets, A4, 52-256 g/m ²
MK-715 Banner tray	Multipage banner feeding
MEDIA OUTPUT	
	6
JS-506 Job separator	Separation of fax output; etc.
FS533 Inner finisher	50-sheet stapling, 500 sheets max. output
PK-519 Punch kit for FS533	2/4 hole punching, autoswitching
FS-539 Staple finisher	50 sheets stapling; 3,200 sheets max. output
FS-539SD Booklet finisher	50 sheets stapling; 20 sheets booklet finisher;
	2,200 sheets max. output
PK-524 Punch kit for FS-539/SD	2/4 hole punching; autoswitching

TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS

AU-102 Biometric authentication

ID card reader

MK-735 Mount kit

STOTE WIST CONTOUND	
System speed A4	Up to 36 ppm
System speed A3	Up to 18 ppm
Autoduplex speed A4	Up to 36 ppm
1st page out time A4	4.6 sec.
Warm-up time	Approx. 12 sec. ¹
Imaging technology	Laser
Toner technology	Simitri® V polymerised toner
Panel size/resolution	10.1" / 1024 x 600
System memory	8,192 MB (standard/max)
System hard drive	256 GB SSD (standard) / 1 TB SSD (optional)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour
Automatic document feeder	Up to 100 originals; A6-A3; 35-163 g/m²; RADF or Dualscan ADF
(optional)	available
ADF double feed detection	Standard (with dualscan ADF)
Printable paper size	A6-SRA3; customized paper sizes;
	banner paper max. 1,200 x 297 mm
Printable paper weight	52-300 g/m ²
Paper input capacity	1,150 sheets / 6,650 sheets (standard/max)
Paper tray input (standard)	1x 500; A6-A3; custom sizes; 52-256 g/m ²
	1x 500; A5-SRA3; custom sizes; 52-256 g/m ²
Paper tray input (optional)	1x 500 sheets; A5-A3; 52-256 g/m ²
	2x 500 sheets; A5-A3; 52-256 g/m ²
	1x 2,500 sheets; A4; 52-256 g/m ²
	1x 1,500 + 1x 1,000 sheets; A5-A4; 52-256 g/m ²
Large capacity tray (optional)	1x 3,000; A4; 52-256 g/m ²

SYSTEM SPECIFICATIONS

RU-513 Relay unit

Finishing modes (optional)	Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold;
	Letter-fold; Booklet
Automatic duplexing	A6-SRA3; 52-256 g/m ²
Output capacity	Up to 250 sheets / up to 3,300 sheets (standard/max)
Stapling	Max. 50 sheets or 48 sheets + 2 cover sheets (up to 209 g/m^2)
Stapling output capacity	Max. 100 sets
Letter fold	Max. 3 sheets
Letter fold capacity	Max. 30 sets; unlimited (without tray)
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet (up to 209 g/m^2)
Booklet output capacity	Max. 20 booklets; unlimited (without tray)
Duty cycle (monthly)	Rec. 33,000 pages; Max. ² 175,000 pages
Toner lifetime	Black up to 25,000 pages
Imaging unit lifetime	Black up to 245,000/1,000,000 pages (drum/developer)
Power consumption	220-240 V / 50/60 Hz; Less than 1.58 kW
System dimension (W x D x H)	615 x 688 x 779 mm (without options)
System weight	Approx. 76.0 kg (without options)

For FS-539/SD installation

PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
Operating systems	Windows 7 (32/64); Windows 8.1 (32/64); Windows 10 (32/64);
	Windows Server 2008 (32/64); Windows Server 2008 R2;
	Windows Server 2012; Windows Server 2012 R2;
	Windows Server 2016; Windows Server 2019;
	Macintosh OS X 10.10 or later; Linux
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	AirPrint (iOS); Mopria (Android);
	Konica Minolta Print Service (Android);
	Konica Minolta Mobile Print (iOS/Android)
	optional: WiFi Direct

SCANNER SPECIFICATIONS

Scan speed	Up to 100/100 ipm in simplex (mono/colour)
	Up to 200/200 ipm in duplex (mono/colour)
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-DPWS; Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; Compact XPS;
	PPTX; PDF/A 1a and 1b
	optional: Searchable PDF; Searchable DOCX/PPTX/XLSX
Scan destinations	2,000 destinations + 100 groups; LDAP support
Scan destinations	2,000 desuriations + 100 groups; LDAP support

COPIER SPECIFICATIONS	
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	Max. A3
Magnification	25-400% in 0.1% steps: Auto-zooming

FAX SPECIFCIATION

Fax standard	Super G3 (optional)
Fax transmission	Analogue; i-Fax; Colour i-Fax; IP-Fax
Fax resolution	Up to 600 x 600 dpi
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,000 single + 100 groups

USER BOX SPECIFICATIONS

Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling

SYSTEM FEATURES

SISILIVITLATURES	
Security	ISO15408 Common Criteria; IP filtering and port blocking;
	SSL3 and TLS1.0/1.1/1.2 network communication; IPsec support,
	IEEE 802.1x support; User authentication; Authentication log;
	Secure print; Kerberos; Hard drive overwrite;
	Hard drive data encryption (AES 256); Confidential fax;
	Print user data encryption
	optional: Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts; Active Directory support (user name +
	password + e-mail + smb folder); User function access definition;
	Authentication by mobile device (Android)
	optional: Biometric authentication (finger vein scanner);
	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Net Care Device Manager; Data Administrator; Box Operator;
	Web Connection; Print Status Notifier; Driver Packaging Utility;
	Log Management Utility

- ¹ Warm-up time may vary depending on the operating environment and usage
- $^{\mathrm{2}}$ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed
- All specifications refer to A4-size paper of 80 g/m² quality.
 The support and availability of the listed specifications and functionalities varies depending on operating systems, applica-
- tions and network protocols as well as network and system configurations.

 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a $particular\ page\ size\ (6\%\ coverage\ of\ A4).\ The\ actual\ life\ of\ each\ consumable\ will\ vary\ depending\ on\ use\ and\ other\ printing$ variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.





























